# DYNAMIC STABILITY MONTHLY REPORT NORTH ISLAND – MAY 2024

Transpower New Zealand Limited May 2024

### Keeping the energy flowing



### NOTICE

#### COPYRIGHT © 2024 TRANSPOWER New Zealand LIMITED

#### ALL RIGHTS RESERVED

The information contained in the report is protected by copyright vested in Transpower New Zealand Limited ("Transpower"). The report is supplied in confidence to you solely for your information. No part of the report may be reproduced or transmitted in any form by any means including, without limitation, electronic, photocopying, recording, or otherwise, without the prior written permission of Transpower. No information embodied in the report which is not already in the public domain shall be communicated in any manner whatsoever to any third party without the prior written consent of Transpower.

Any breach of the above obligations may be restrained by legal proceedings seeking remedies including injunctions, damages and costs.

#### LIMITATION OF LIABILITY/DISCLAIMER OF WARRANTY

Transpower make no representation or warranties with respect to the accuracy or completeness of the information contained in the report. Unless it is not lawfully permitted to do so, Transpower specifically disclaims any implied warranties of merchantability or fitness for any particular purpose and shall in no event be liable for, any loss of profit or any other commercial damage, including but not limited to special, incidental, consequential or other damages.

Version	Date	Change		
1.0 16/07/2025		Final		
	Position		Date	
Prepared By:	Power Systems	Power Systems Engineer		
Reviewed By: Richard Sherry		, Principal Engineer	16/07/2025	

## Contents

1	Executive summary	. 4
1.1	Purpose	. 4
1.2	Revisions from January 2024	. 4
2	Oscillation Behaviour	. 5
2.1	Typical Modes observed on the Island	. 5
2.2	Unusual Behaviour Observed this month	. 6
3	How To Interpret the Graphical data	. 8
4	Detailed plots for May 2024	11
4.1	Mode frequency histograms	11
4.1.1	PMU Frequency Data	.11
4.1.2	PMU Active Power Data	. 14
4.2	Time Series Plots	17
4.2.1	PMU Frequency Data	. 17
4.2.2	PMU Active Power Data	.35

## **1 Executive summary**

### 1.1 Purpose

The low frequency dynamic oscillatory stability of the power system has been analyzed using phasor measurement unit data.

These monthly reports can be used to track significant changes over time specifically aimed at documenting 'normal' system oscillation behaviour and identifying any changes.

If some oscillation modes have changed significantly, or there is evidence of poor damping events, a more detailed investigation would be required to identify the cause (e.g. load growth, new generation, machine or plant controller, system topology/outages, etc.)

The reporting for 2024 is modified to a more "by exception" approach. The normally observed oscillation behaviour for the Island is quite well known from a number of years of reporting. This is summarized in section 2.1. Any new or unusual behaviour observed in the month is then reported in section 2.2.

### 1.2 Revisions from January 2024

The report format has been updated for 2024. The histograms of recorded data are retained, but the previous time trends have been replaced with a new formatting of the data which also captures, in the time series trend, the behaviour of all identified oscillations across the frequency spectrum (of 0.04 to 4 Hz) rather than presenting just the largest mode within a number of specified frequency bands.

The new format contains more information, a summary of how to interpret the new plots has been included along with a comparison of how the pre-2024 trend would look.

## 2 Oscillation Behaviour

## 2.1 Typical Modes observed on the Island


Mode freq.	Signal	Comments	Typical Behaviour
0.04 Hz	All-f All-P	Low frequency hydro governor mode Well damped but detected almost continuously	Frequency analysis - at all sites Magnitude observed is in the 10 to 30 mHz range, decay time in the 10 to 40s range (which is only 1 or 2 cycles at this frequency) MW analysis – Magnitude is typically up to 2 or 3 MW but varies at different sites and can be up to 6 MW, decay time in the 10 to 40s range
0.25 Hz	All-f	Consistently observed but the cause has not been identified Can have periods of very low damping, but remains at low magnitude. Will be investigated if the magnitude increases	Frequency analysis - at all sites Magnitude observed is in the 1 to 5 mHz range, decay time can be up to 100s (or more) MW analysis – mode is detected with similar long decay times, but magnitude is very low, less than 1 MW
0.5–0.6 Hz	All-f	Not continuously observed, but very common. Very low magnitude Possibly an inter-area mode but not identified in linear analysis.	Frequency analysis - Magnitude up to 2 mHz, decay time typically 10 to 20s. MW analysis – Magnitudes below 1 MW at all sites, decay times similar to the frequency analysis
0.7–0.9 Hz	All-f All-P	Inter-area modes. Usually continuously observed but low magnitude	Frequency analysis - Magnitude up to 2 mHz, decay time typically below 10s but can be up to 20s. MW analysis – Magnitudes typically below 2 MW at all sites, decay times similar to the frequency analysis
0.95–1.4 Hz	All-f All-P	Local and inter-area modes. Commonly observed at all sites,	Frequency analysis - Magnitude up to 2 mHz, decay

		such modes exist for all synchronous generation	time typically 10s but can be up to 20s. MW analysis – Magnitudes up to 2 MW at all sites, decay times up to 40s.
1.6 Hz	All-f All-P	Inter-station modes for central NI generation Continuously observed	Frequency analysis - Magnitude up to 2 mHz, decay time typically 10s but can be up to 40s. MW analysis – Magnitudes up to 2 MW at all sites, decay times up to 100s at BPE.
1.8 Hz	BPE-f BPE-P	TNG load related (up to 5/8/2024). Observed at most sites at a lower magnitude than at BPE. Mode disappears after Winstone TNG factory closure	Frequency analysis - Magnitude (BPE) up to 5 mHz, decay time typically 20s but can be up to 100s. MW analysis – Magnitude (BPE) up to 6 MW, decay times similar to frequency.
>2.0 Hz	All-f	Controller modes Observed intermittently across all sites. Very low magnitude and well damped.	Frequency analysis - Magnitude rarely above 0.5 mHZ, decay time under 10s MW analysis – magnitude up to 1 MW but usually below 0.5 MW, decay time under 10s.

## 2.2 Unusual Behaviour Observed this month

Nothing unusual to report.

On the 22<sup>nd</sup> May there was a short period where the TNG load was fed radially from BPE, a spike in the amplitude of the 1.8 Hz mode (MW) was observed (Figure 32) corresponding with the period where BPE was the only connection to this load.

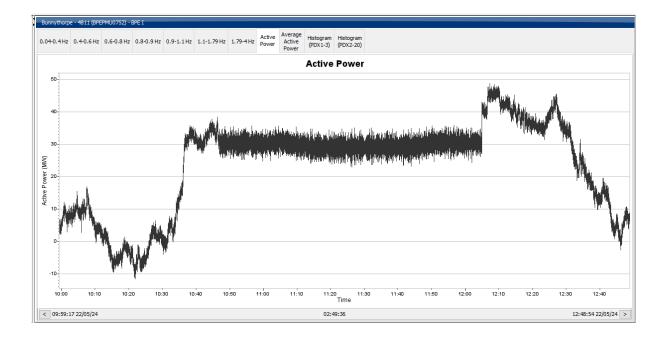

## **3 How To Interpret the Graphical data**

The reporting is done in various plots, which are explained in this section.


The analysis is done on two power system variables : frequency (Hz) and Real Power (MW)

At PMUs measuring reactive power devices only frequency is analyzed, but we have no PMUs like this in the North Island. So in the North Island reports there are 6 locations for both frequency and MW.

Section 4.1 has histogram plots. These show the decay time (1<sup>st</sup> plot) and magnitude (middle plot) of every recorded oscillation mode (the frequency of the mode is the x-axis in 0.1 Hz increments). These do not show when the particular points were recorded.

The  $3^{rd}$  plot is a cumulative frequency plot to indicate how often each particular modal frequency (in 0.1 Hz bands) was reported. The source software reports on the modes it detects, updated at 20 second intervals, and it can identify from 0 to 5 modes at each time. For a 31 day month there would be 133,920 results (= 3\*60\*24\*31) with 0 to 5 modes in each – and the histogram is showing the proportion of the 133,920 results which contained this mode frequency.

Example below is the (South Island) TWZ frequency analysis histograms :

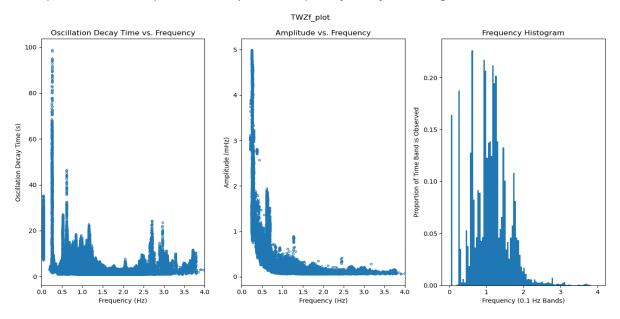


Note that the magnitude plot in the frequency (mHz) histograms is scaled to show the typical range of amplitude and does not usually show the 0.04 Hz mode amplitude as it is above the scale. This amplitude is shown in the time series data.

Section 4.2 has time series plots. These show the results plotted against the day of the month along the x-axis. The plots use a colour coding (heat scale) for each data point to represent the mode frequency.

For each variable analyzed there are 3 time series plots, the first just shows the mode frequency detected (the heat scale does not add any information to this plot but is retained for consistency), the second shows the amplitude recorded and the 3<sup>rd</sup> shows the decay time expressed as the number of oscillation cycles at that modal frequency. Expressing the decay time in cycles provides a better indication of whether the decay time is a problem or not.

For the same TWZ frequency results as shown in the histograms above the amplitude time series plot is shown below (note the y-axis scale is split into 2 plots to show the higher magnitude of the 0.04 Hz mode) :

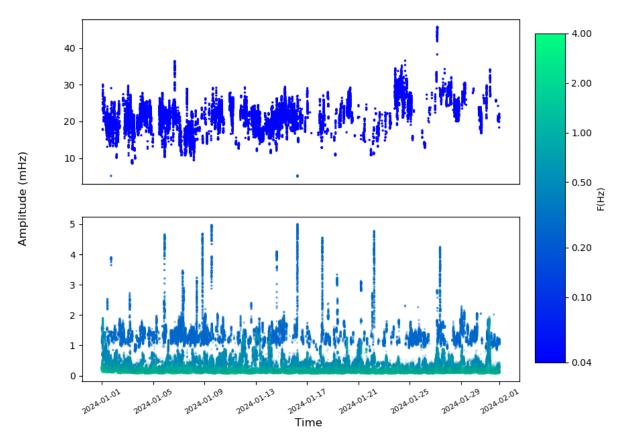

TWZf Amplitude vs. Time


The heat scale shows the modal frequency of the particular amplitude result, in this case the 5mHz peaks are all at or close to the 0.25Hz mode.

The histogram identifies that there are results with 5 mHz amplitude at this frequency - the time series plot indicates the spread of these peak occurrences through the month and also shows any other characteristics at that frequency – such as the 'normal' amplitude.


The corresponding damping cycles time series plot is shown below.

The relatively high decay times of the 0.04 Hz mode are seen to be all below 2 cycles at that modal frequency. When decay times are say 40 or 50 cycles at a particular modal frequency there may be more cause for concern.

TWZf Damping Cycles vs. Time

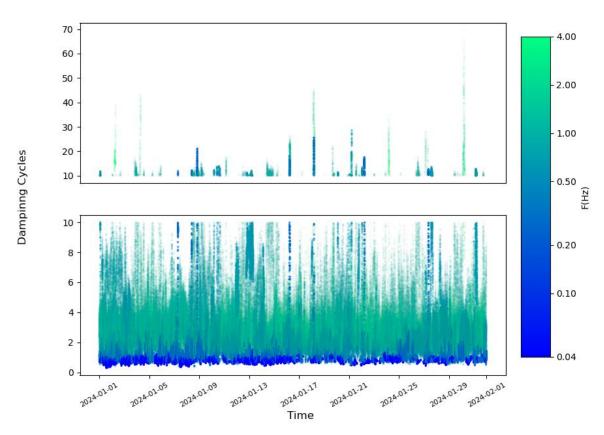

The pre-2024 monthly reports would have displayed the time series data as a smoothed trend with a frequency band (with all sites plotted together) i.e for the 0 to 0.4 Hz band :

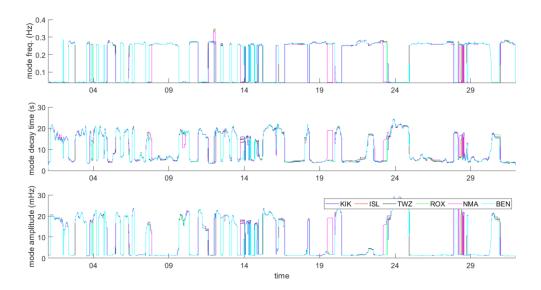

The new method of plotting shows all the data – this shows the full-month time series behaviour of all modes – and overcomes the issue of only showing the 'worst' result within a band (which causes the plot above to alternately show the 0.04 Hz mode and the 0.25 Hz mode).

## 4 Detailed plots for May 2024

### 4.1 Mode frequency histograms

Remark: the frequency histograms are shown for a frequency range [0.04 4Hz]

### 4.1.1 PMU Frequency Data

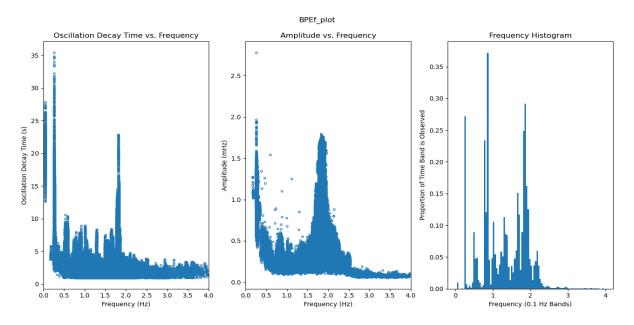


Figure 1: Bunnythorpe mode damping, mode amplitude, and frequency histogram using frequency data

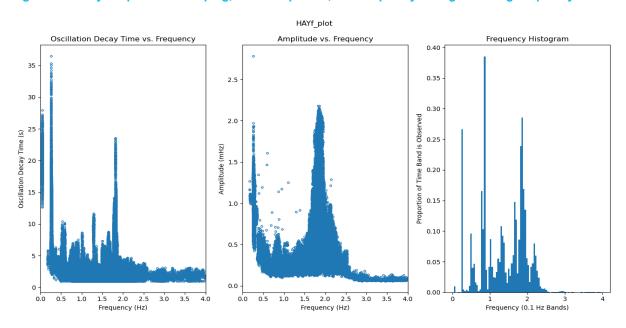


Figure 2: Haywards mode damping, mode amplitude, and frequency histogram using frequency data

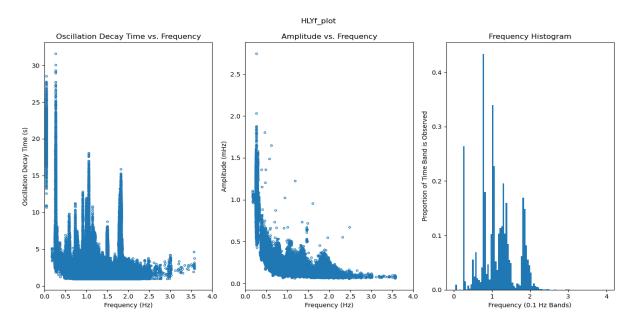


Figure 3: Huntly mode damping, mode amplitude, and frequency histogram using frequency data

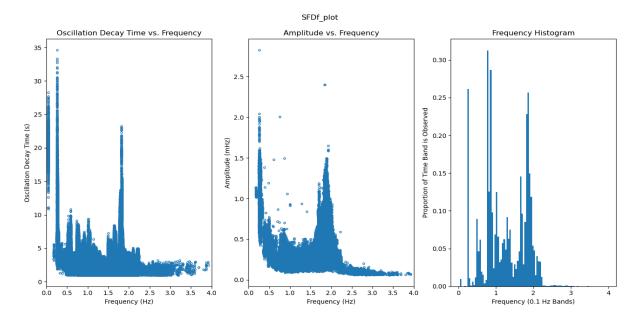


Figure 4: Stratford mode damping, mode amplitude, and frequency histogram using frequency data

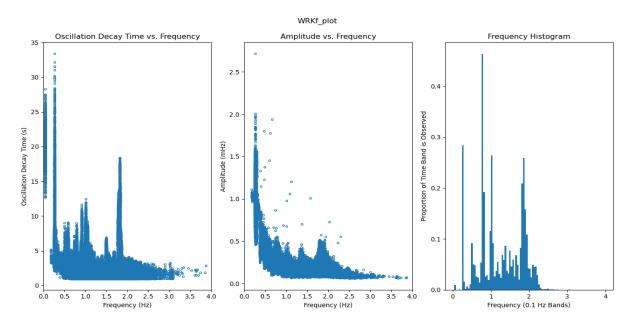


Figure 5: Wairakei mode damping, mode amplitude, and frequency histogram using frequency data


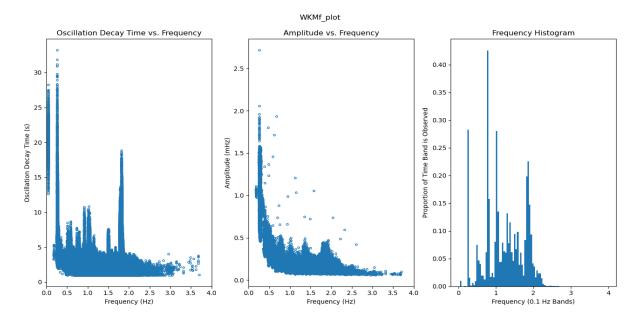


Figure 6: Whakamaru mode damping, mode amplitude, and frequency histogram using frequency data

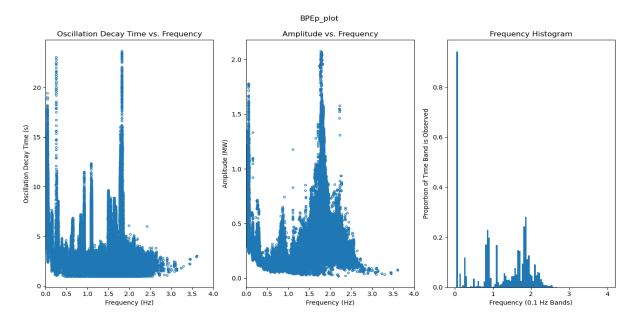

#### 4.1.2 PMU Active Power Data

Figure 7: Bunnythorpe mode damping, mode amplitude, and frequency histogram using active power data

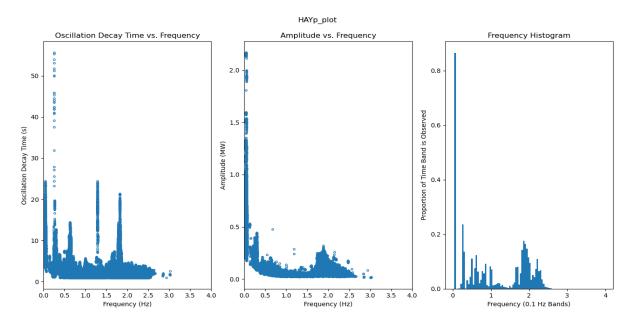


Figure 8: Haywards mode damping, mode amplitude, and frequency histogram using active power data

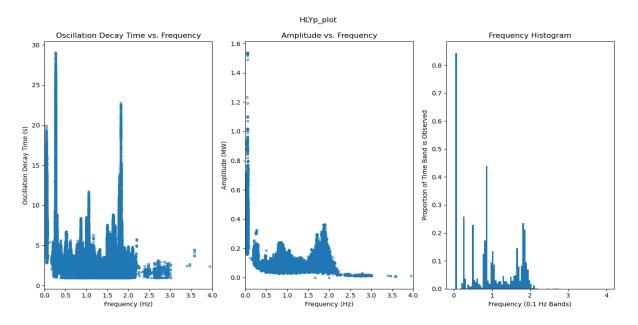


Figure 9: Huntly mode damping, mode amplitude, and frequency histogram using active power data

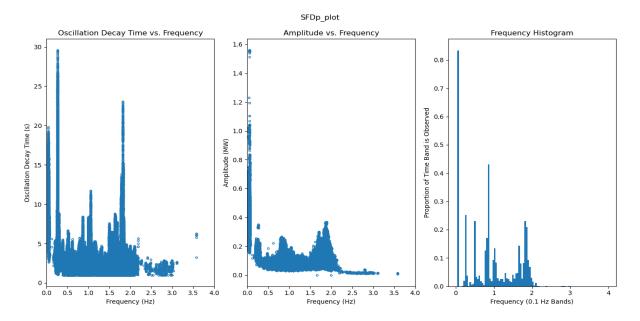
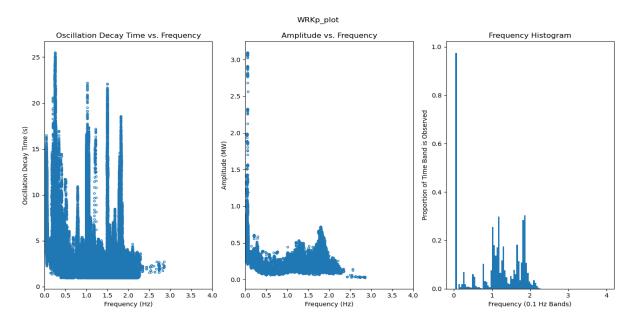


Figure 10: Stratford mode damping, mode amplitude, and frequency histogram using active power data





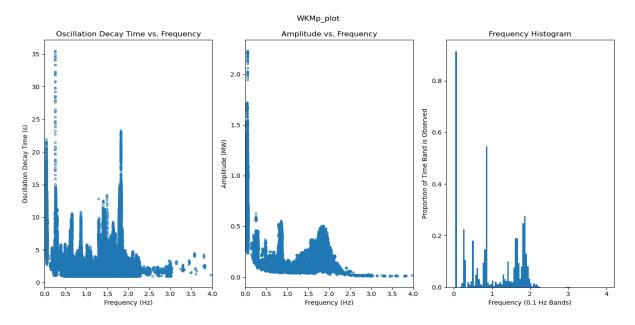


Figure 12: Whakamaru mode damping, mode amplitude, and frequency histogram using active power data

### 4.2 Time Series Plots

### 4.2.1 PMU Frequency Data

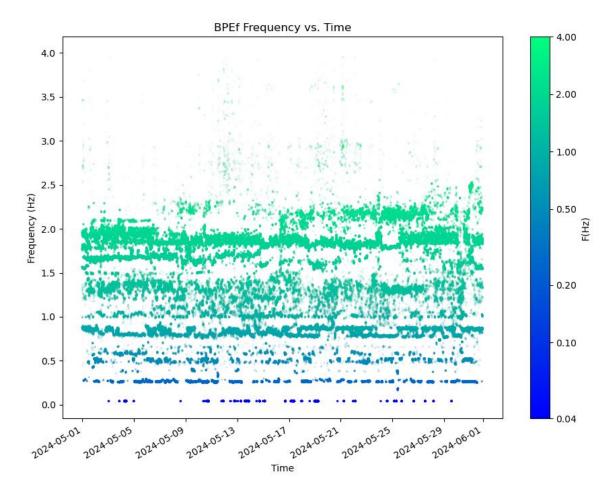


Figure 13: Bunnythorpe

BPEf Amplitude vs. Time

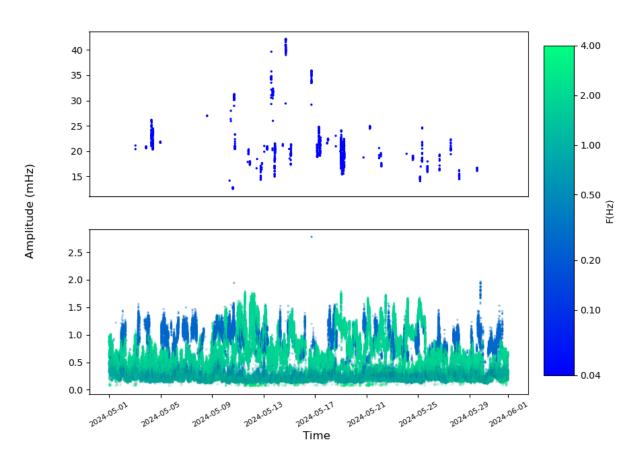


Figure 14: Bunnythorpe

BPEf Damping Cycles vs. Time

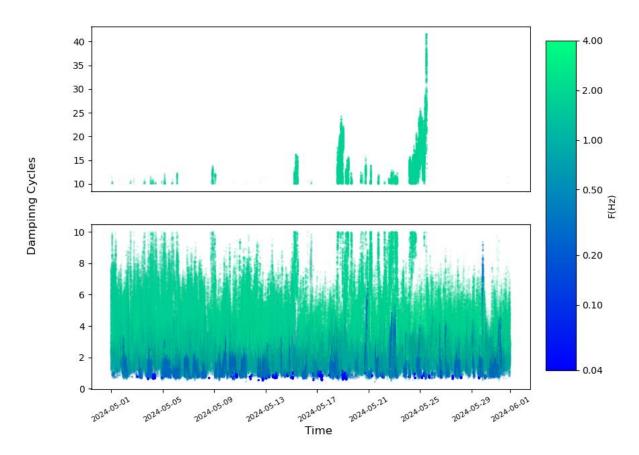


Figure 15: Bunnythorpe

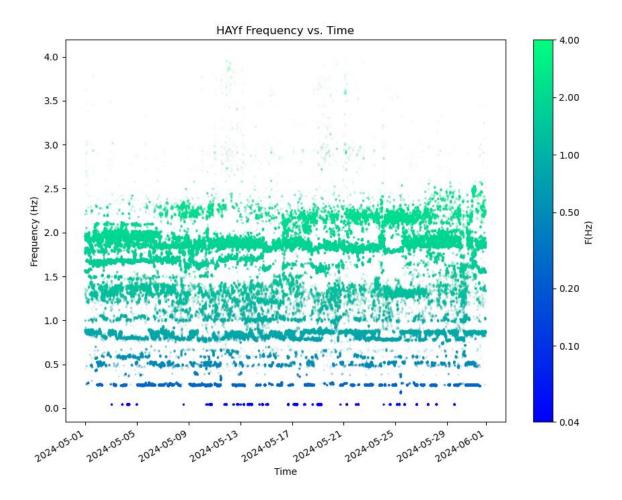


Figure 16: Haywards

HAYf Amplitude vs. Time

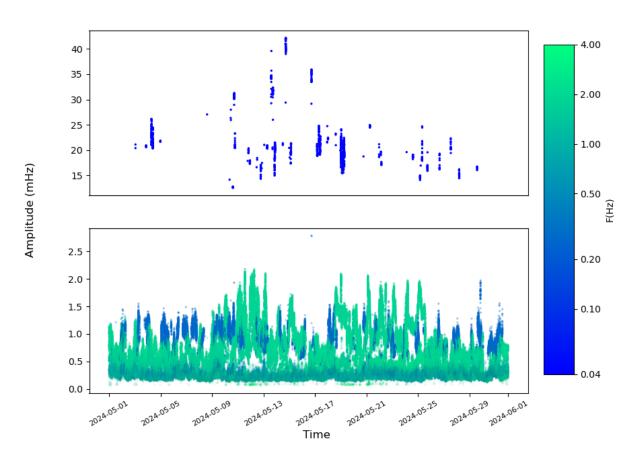


Figure 17: Haywards

HAYf Damping Cycles vs. Time

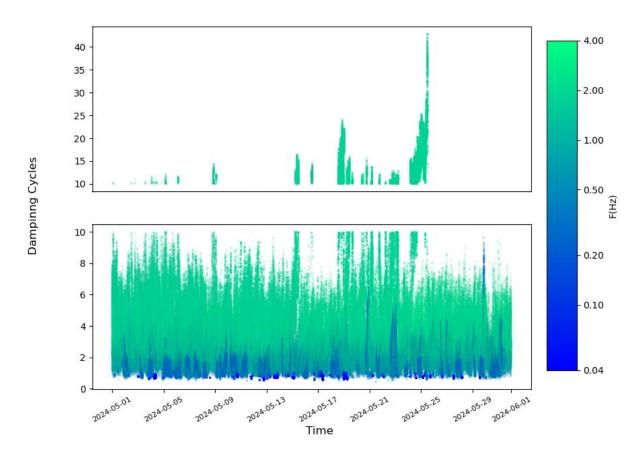


Figure 18: Haywards

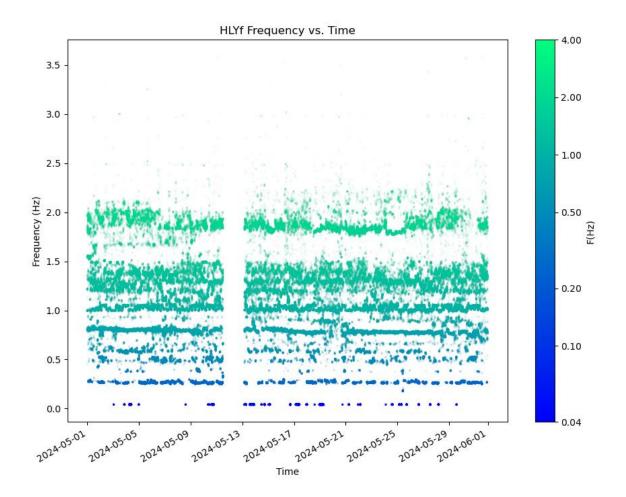


Figure 19: Huntly

HLYf Amplitude vs. Time

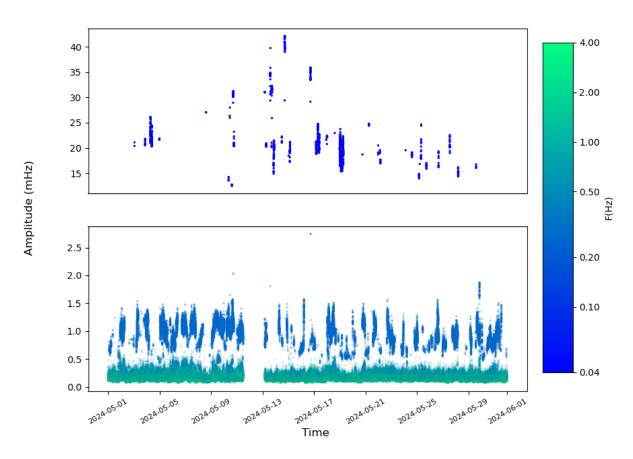


Figure 20: Huntly

HLYf Damping Cycles vs. Time

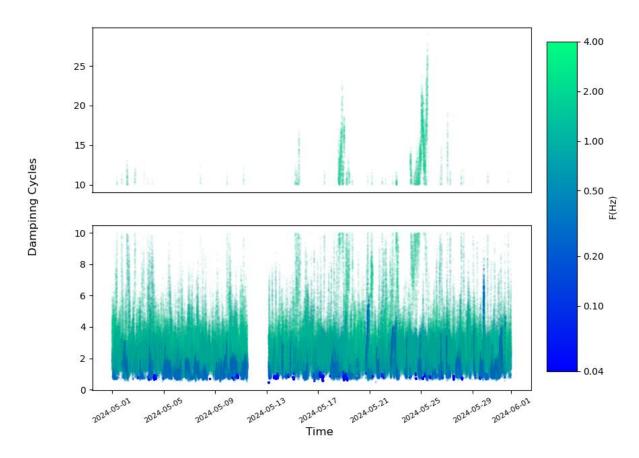


Figure 21: Huntly

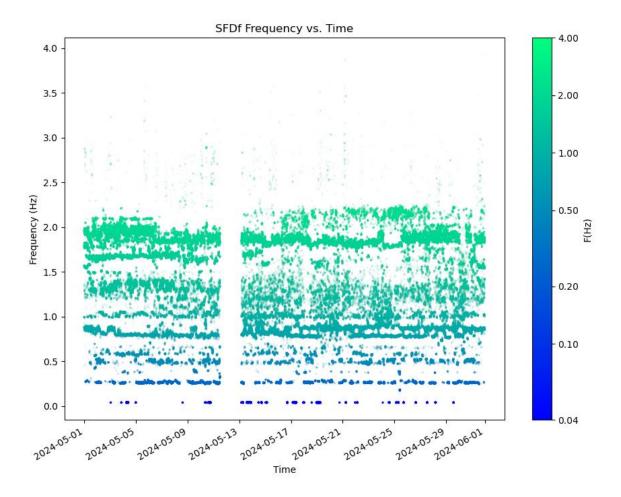


Figure 22: Stratford

SFDf Amplitude vs. Time

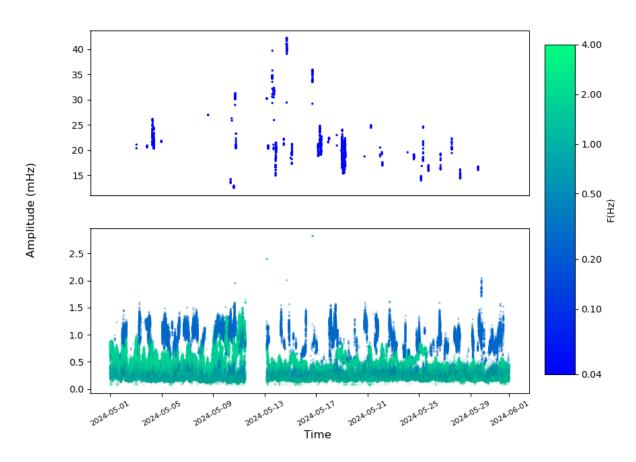


Figure 23: Stratford

SFDf Damping Cycles vs. Time

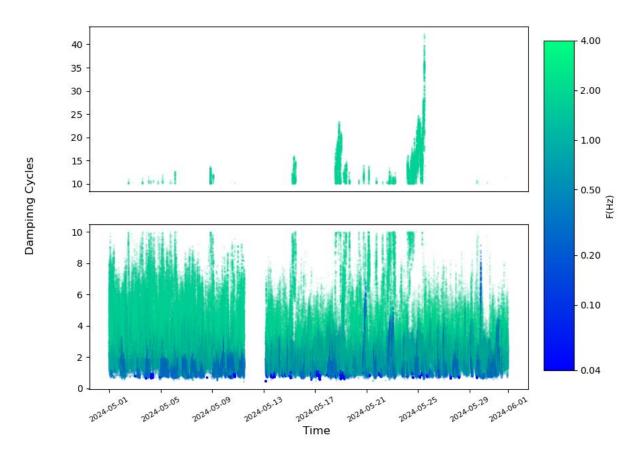


Figure 24: Stratford

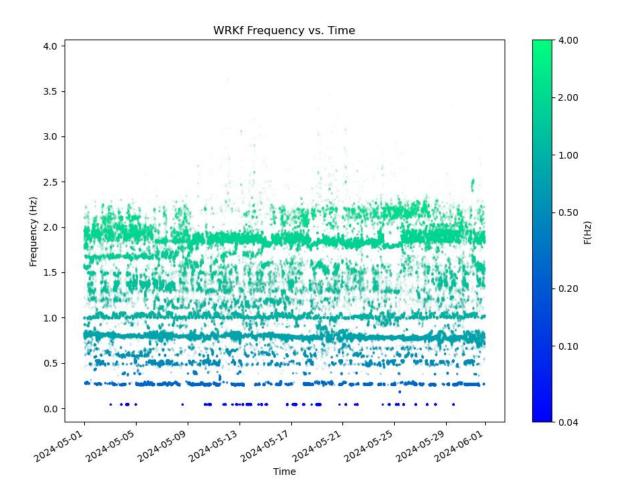


Figure 25: Wairakei

WRKf Amplitude vs. Time

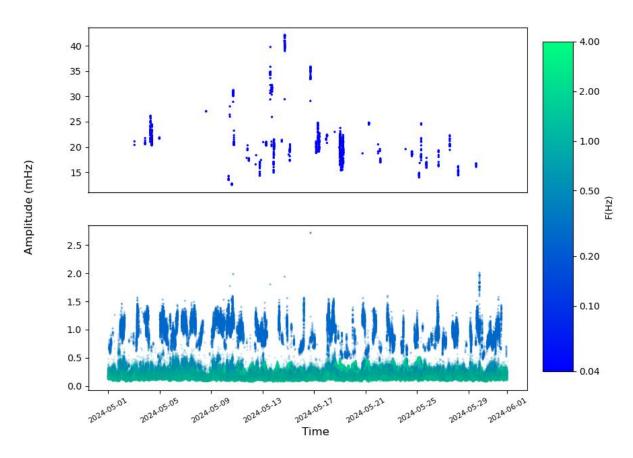


Figure 26: Wairakei

WRKf Damping Cycles vs. Time

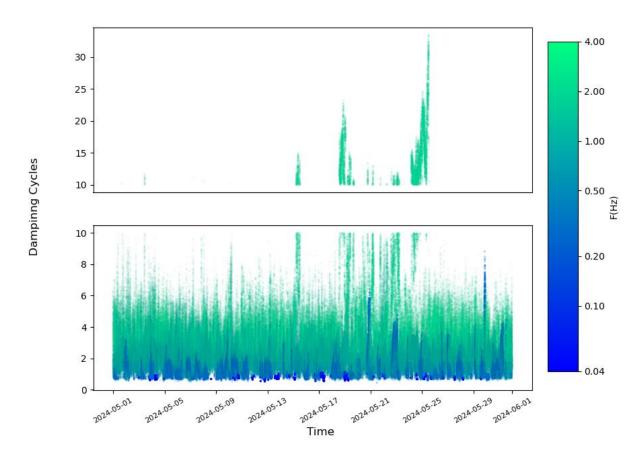


Figure 27: Wairakei

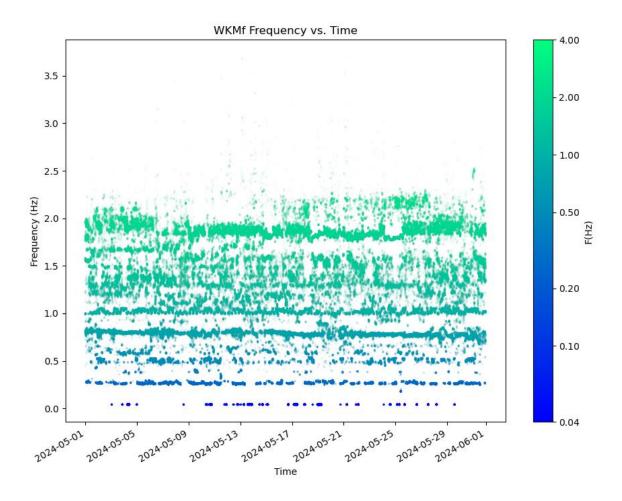


Figure 28: Whakamaru

WKMf Amplitude vs. Time

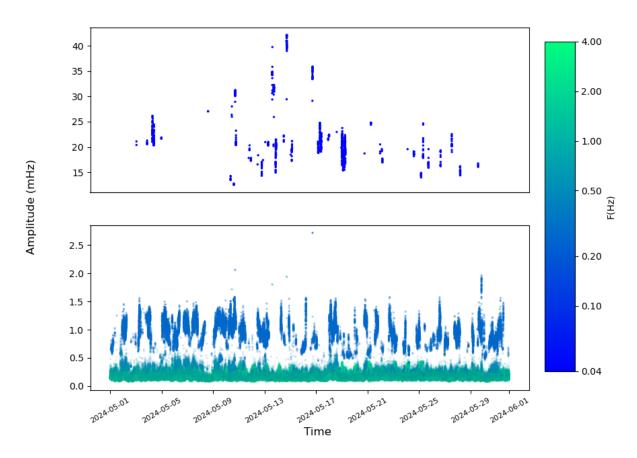


Figure 29: Whakamaru

WKMf Damping Cycles vs. Time

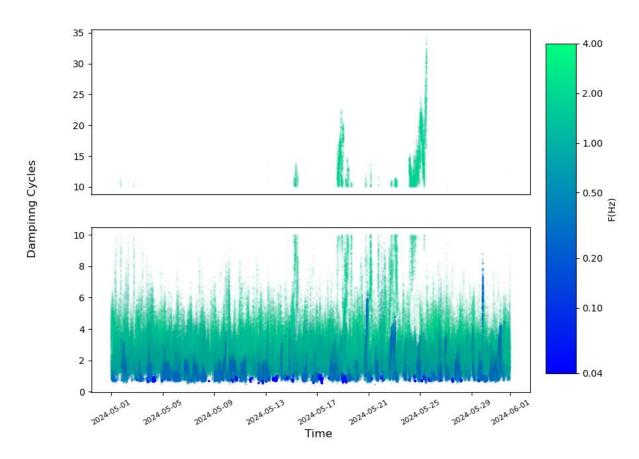


Figure 30: Whakamaru

#### 4.2.2 PMU Active Power Data


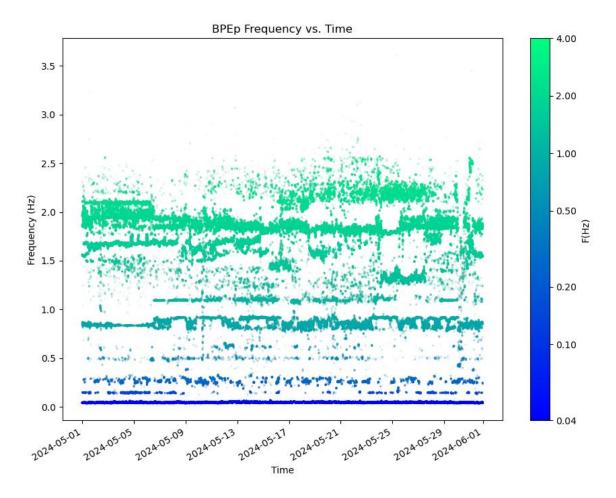


Figure 31: Bunnythorpe

BPEp Amplitude vs. Time

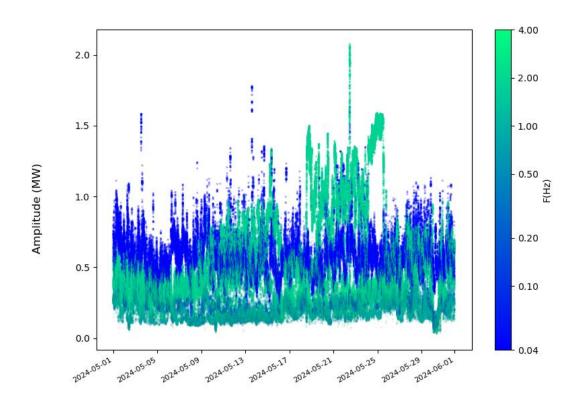

Time

Figure 32: Bunnythorpe

BPEp Damping Cycles vs. Time

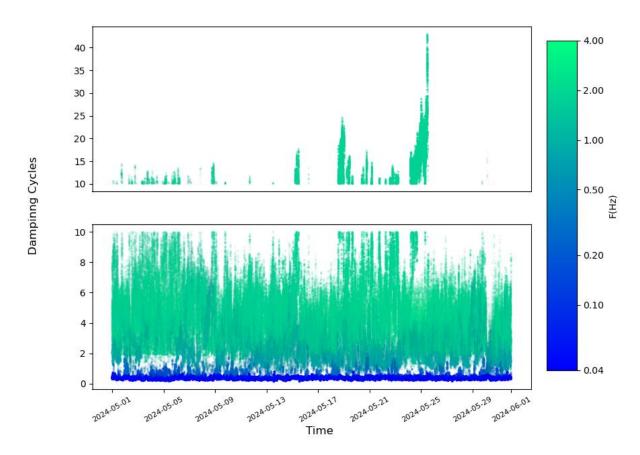


Figure 33: Bunnythorpe


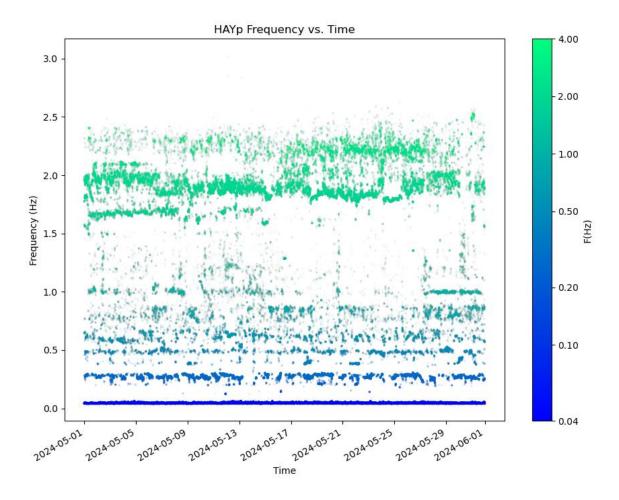


Figure 34: Haywards

HAYp Amplitude vs. Time

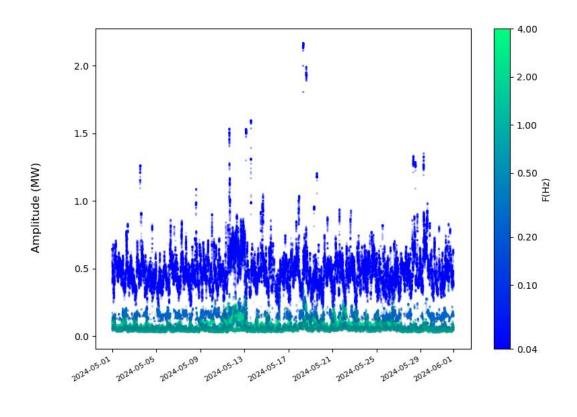

Time

Figure 35: Haywards

HAYp Damping Cycles vs. Time

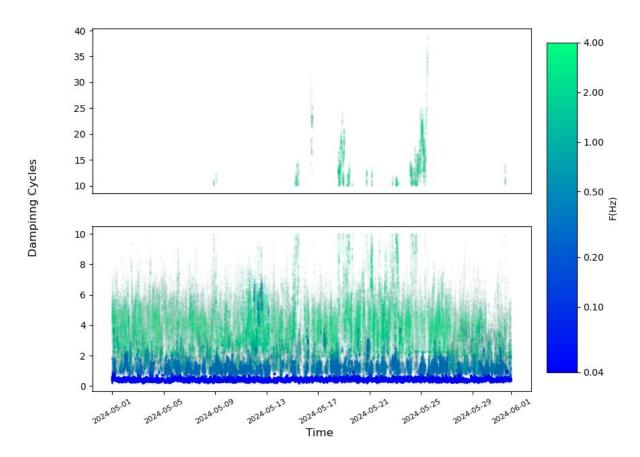


Figure 36: Haywards

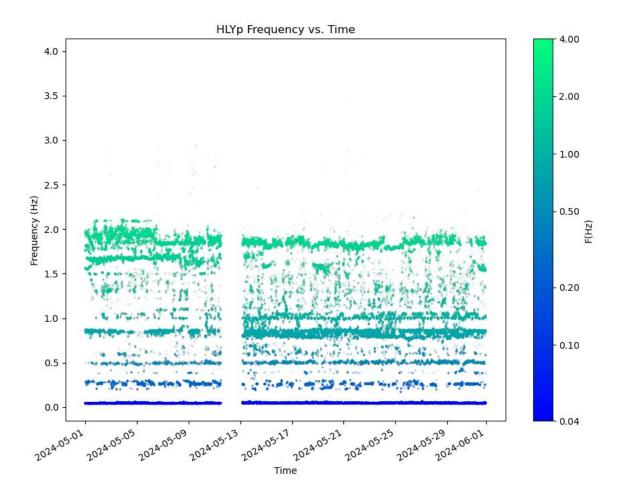


Figure 37: Huntly

HLYp Amplitude vs. Time

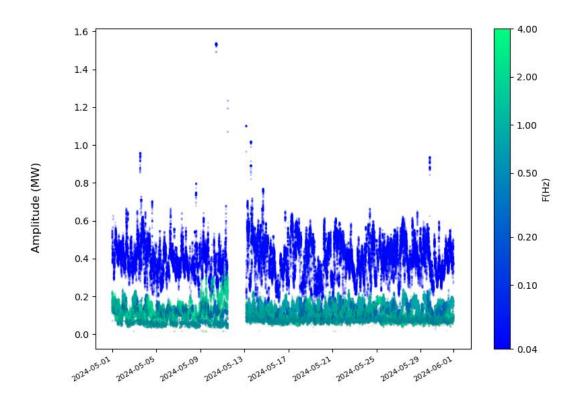




Figure 38: Huntly

HLYp Damping Cycles vs. Time

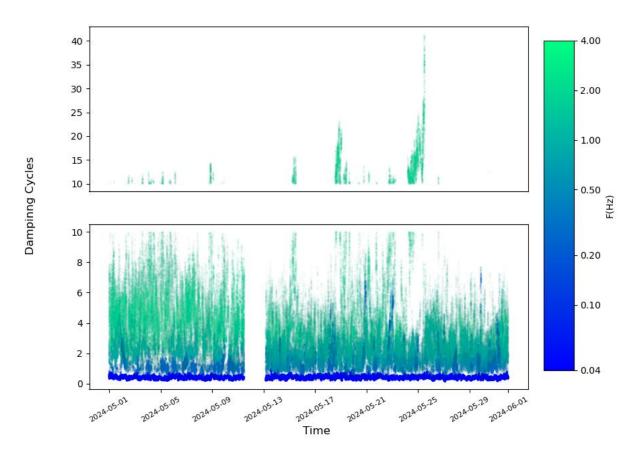


Figure 39: Huntly

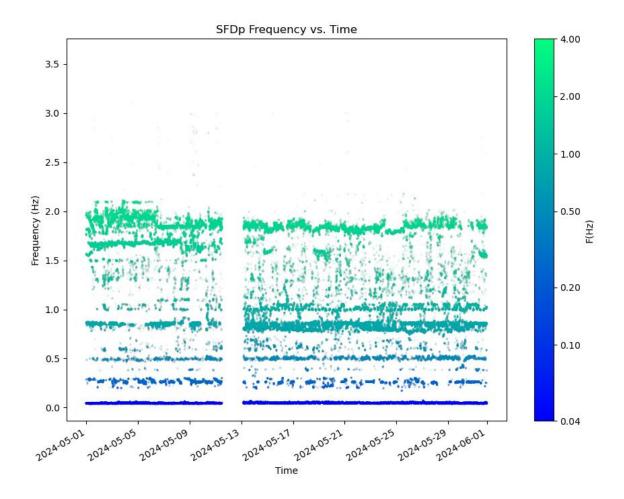


Figure 40: Stratford

SFDp Amplitude vs. Time

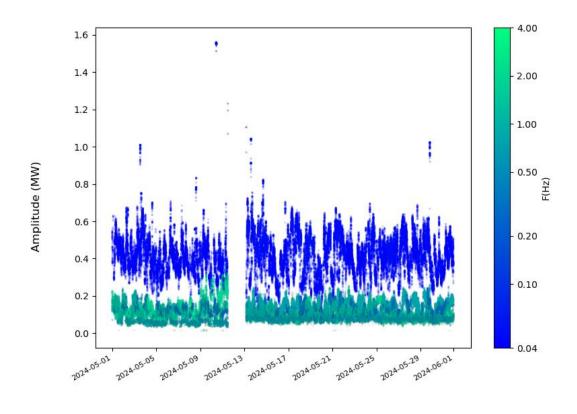




Figure 41: Stratford

SFDp Damping Cycles vs. Time

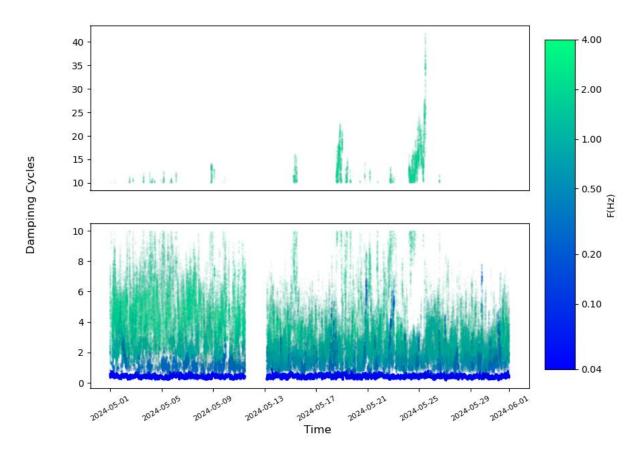


Figure 42: Stratford

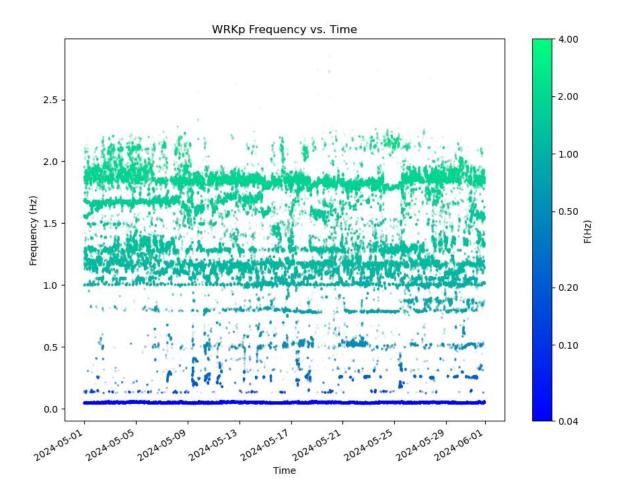


Figure 43: Wairakei

WRKp Amplitude vs. Time

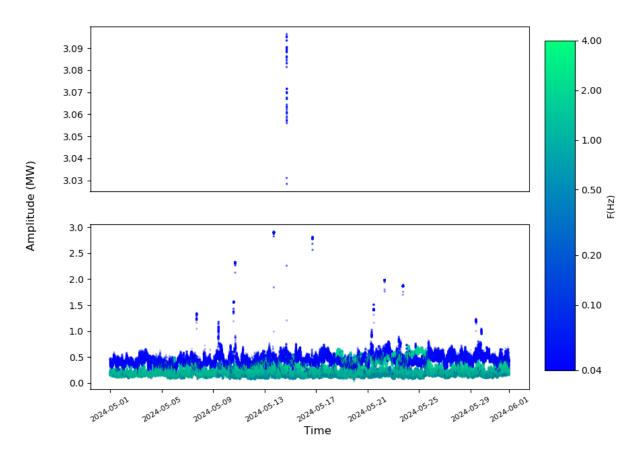


Figure 44: Wairakei

WRKp Damping Cycles vs. Time

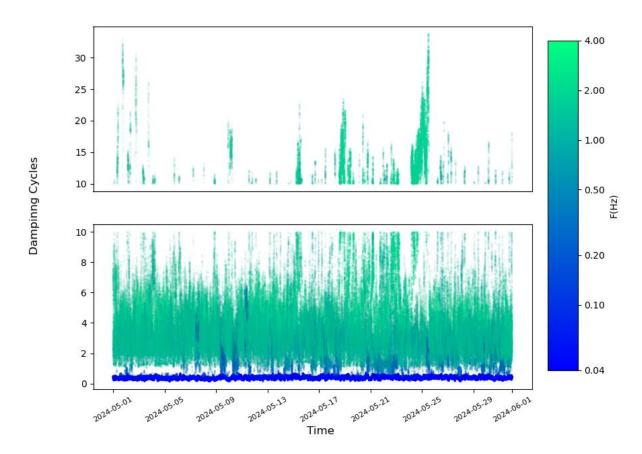


Figure 45: Wairakei

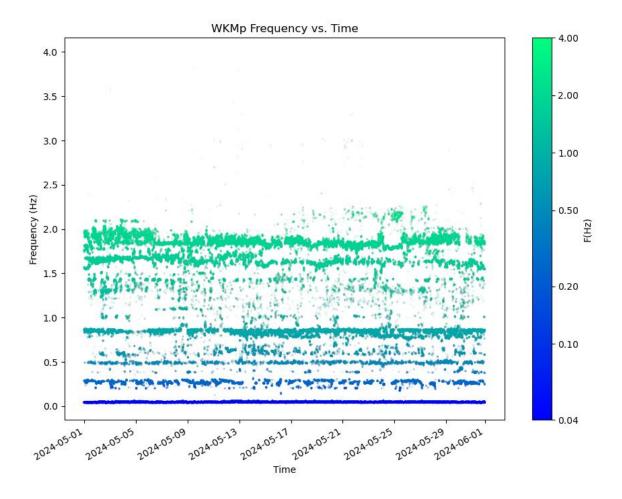


Figure 46: Whakamaru

WKMp Amplitude vs. Time

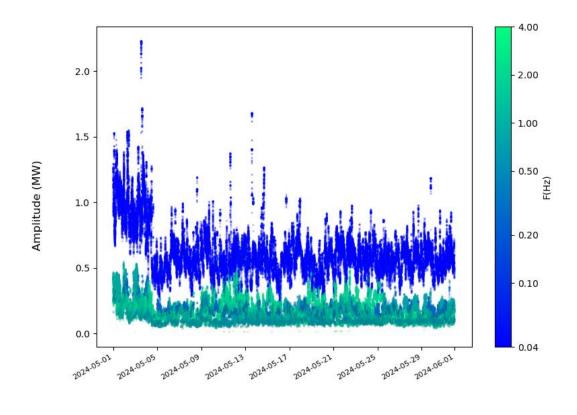




Figure 47: Whakamaru

WKMp Damping Cycles vs. Time

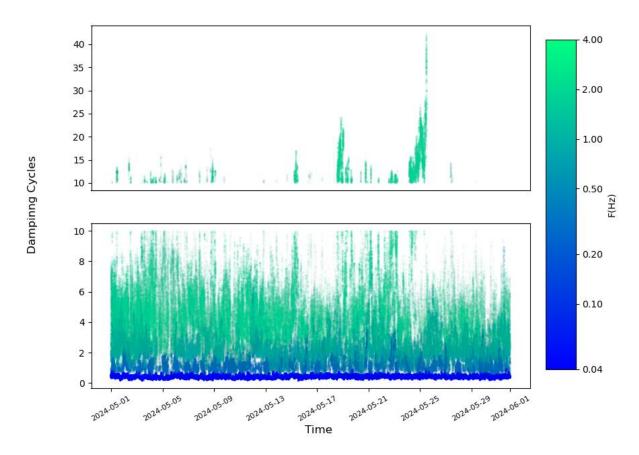


Figure 48: Whakamaru