DYNAMIC STABILITY MONTHLY REPORT

SOUTH ISLAND - JULY 2024

Transpower New Zealand Limited

July 2024

Keeping the energy flowing



NOTICE

COPYRIGHT © 2024 TRANSPOWER New Zealand LIMITED

ALL RIGHTS RESERVED

The information contained in the report is protected by copyright vested in Transpower New Zealand Limited ("Transpower"). The report is supplied in confidence to you solely for your information. No part of the report may be reproduced or transmitted in any form by any means including, without limitation, electronic, photocopying, recording, or otherwise, without the prior written permission of Transpower. No information embodied in the report which is not already in the public domain shall be communicated in any manner whatsoever to any third party without the prior written consent of Transpower.

Any breach of the above obligations may be restrained by legal proceedings seeking remedies including injunctions, damages and costs.

LIMITATION OF LIABILITY/DISCLAIMER OF WARRANTY

Transpower make no representation or warranties with respect to the accuracy or completeness of the information contained in the report. Unless it is not lawfully permitted to do so, Transpower specifically disclaims any implied warranties of merchantability or fitness for any particular purpose and shall in no event be liable for, any loss of profit or any other commercial damage, including but not limited to special, incidental, consequential or other damages.

Version	Date	Change	
1.0	16/07/2025	Final 0.32 Hz mode first observed in June also observed this month	
	Position		Date
Prepared By		ns Engineer	9/06/2025
Reviewed By	y: Richard Sherr	Richard Sherry, Principal Engineer	

Contents

1	Executive summary	4
1.1	Purpose	4
1.2	Revisions from January 2024	4
2	Oscillation Behaviour	5
2.1	Typical Modes observed on the Island	5
2.2	Unusual Behaviour Observed this month	6
3	How To Interpret the Graphical data	8
4	Detailed plots for July 2024	11
4.1	Mode frequency histograms	11
4.1.1	PMU Frequency Data	11
4.1.2	PMU Active Power Data	14
4.2	Time Series Plots	16
4.2.1	PMU Frequency data	16
4.2.2	PMU active power plots	34

1 Executive summary

1.1 Purpose

The low frequency dynamic oscillatory stability of the power system has been analyzed using phasor measurement unit data.

These monthly reports can be used to track significant changes over time specifically aimed at documenting 'normal' system oscillation behaviour and identifying any changes.

If some oscillation modes have changed significantly, or there is evidence of poor damping events, a more detailed investigation would be required to identify the cause (e.g. load growth, new generation, machine or plant controller, system topology/outages, etc.)

The reporting from 2024 onwards is modified to a more "by exception" approach. The normally observed oscillation behaviour for the Island is quite well known from a number of years of reporting. This is summarized in section 2.1. Any new or unusual behaviour observed in the month is then reported in section 2.2

1.2 Revisions from January 2024

The report format has been updated for 2024. The histograms of recorded data are retained, but the previous time trends have been replaced with a new formatting of the data which also captures, in the time series trend, the behaviour of all identified oscillations across the frequency spectrum (of 0.04 to 4 Hz) rather than presenting just the largest mode within a number of specified frequency bands.

The new format contains more information, a summary of how to interpret the new plots has been included along with a comparison of how the pre-2024 trend would look.

2 Oscillation Behaviour


2.1 Typical Modes observed on the Island

Mode freq.	Signal	Comments	Typical behaviour
0.04 Hz	All-f All-P	Low frequency hydro governor mode Well damped but detected almost continuously	Frequency analysis - at all sites Magnitude observed is in the 10 to 70 mHz range, decay time in the 10 to 30s range (which is only approx. 1 cycle at this frequency) MW analysis – Magnitude is typically up to 2 or 3 MW but varies at different sites and can be up to 6 MW, decay time in the 10 to 30s range
0.25 Hz	All-f	Consistently observed but the cause has not been identified Can have periods of very low damping, but remains at low magnitude. Will be investigated if the magnitude increases	Frequency analysis - at all sites Magnitude observed is in the 1 to 5 mHz range, decay time can be up to 100s (or more) MW analysis – mode is detected with similar long decay times, but magnitude is very low, less than 1 MW
0.5–0.6 Hz	NMA-f All	Not continuously observed, but very common. Some instances of increased magnitude appear to be related to the TWI load Could also be an interarea mode but not identified by linear analysis. High decay times observed (>30s)	Frequency analysis - Magnitude up to 6 mHz at NMA, 2 or 3 mHz elsewhere, decay time typically 50 to 60s. MW analysis – Magnitudes below 1 MW at all sites, decay times similar to the frequency analysis
0.8–1.0 Hz	All-f All-P	Inter-area modes associated with Manapouri station. A number of modes exist, the mode observed will vary with generation dispatch and system outages	Frequency analysis - Magnitude up to 5 mHz, decay time typically below 10s but can be up to 30s. MW analysis – Magnitudes typically below 1 MW at all sites,

			decay times similar to the frequency analysis
1.0–1.5 Hz	All-f All-P	Local and inter-area modes. Commonly observed at all sites, such modes exist for all synchronous generation	Frequency analysis - Magnitude up to 3 mHz, decay time typically 20s. MW analysis - Magnitudes up to 2 MW at all sites, decay times up to 40s.
>2.0 Hz	KIK-f ISL-f All-f	Controller modes Well damped, possibly associated with SVC and STC control as it is observed most in KIK-f and ISL-f	Frequency analysis - Magnitude up to 3 mHZ at KIK and ISL, up to 1 mHz elsewhere, decay time typically 20 to 30s. Magnitude and decay times reduce at more southerly sites MW analysis – rarely observed, magnitudes will be very low, decay times similar to frequency analysis.

2.2 Unusual Behaviour Observed this month

The low frequency mode observed in June 2024 at $0.32~{\rm Hz}$ remains present and poorly damped for the first half of July. The observed frequency is around $0.27~{\rm Hz}$ in the example below but was commonly at $0.32~{\rm Hz}$

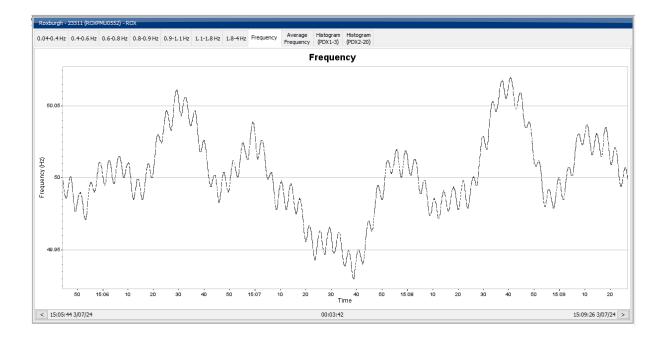

Periods of low damping were:

3 July 15:00 to 15:40 at 0.27 Hz

10 July 22:30 to 23:30 at 0.32 Hz

13 July 09:00 to 11:00 at 0.32 Hz

14 July 15:30 to 16:30 at 0.29 Hz

15 July 00:30 to 02:00 at 0.32 Hz

20 July 06:30 to 07:00 at 0.32 Hz

Oscillation magnitudes were about 10mHz and up to 1.5 MW which is not an immediate concern.

The behaviour is being monitored for now, and a cause is being investigated. As the oscillations remain intermittent and relatively low magnitude, it is not considered to be presenting any specific risk to the power system.

3 How To Interpret the Graphical data

The reporting is done in various plots, which are explained in this section.


The analysis is done on two power system variables: frequency (Hz) and Real Power (MW)

At PMUs measuring reactive power devices (such as ISL and KIK) only frequency is analyzed, so in the South Island reports there are 6 locations for frequency and 4 locations for MW.

Section 4.1 has histogram plots. These show the decay time (1st plot) and magnitude (middle plot) of every recorded oscillation mode (the frequency of the mode is the x-axis in 0.1 Hz increments). These do not show when the particular points were recorded.

The 3rd plot is a cumulative frequency plot to indicate how often each particular modal frequency (in 0.1 Hz bands) was reported. The source software reports on the modes it detects, updated at 20 second intervals, and it can identify from 0 to 5 modes at each time. For a 31 day month there would be 133,920 results (= 3*60*24*31) with 0 to 5 modes in each – and the histogram is showing the proportion of the 133,920 results which contained this mode frequency.

Example below is the TWZ frequency analysis histograms:

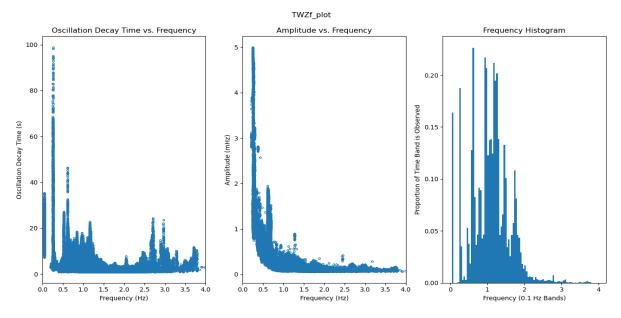


Note that the magnitude plot in the frequency (mHz) histograms is scaled to show the typical range of amplitude and does not usually show the 0.04 Hz mode amplitude as it is above the scale. This amplitude is shown in the time series data.

Section 4.2 has time series plots. These show the results plotted against the day of the month along the x-axis. The plots use a colour coding (heat scale) for each data point to represent the mode frequency.

For each variable analyzed there are 3 time series plots, the first just shows the mode frequency detected (the heat scale does not add any information to this plot but is retained for consistency), the second shows the amplitude recorded and the 3rd shows the decay time expressed as the number of oscillation cycles at that modal frequency. Expressing the decay time in cycles provides a better indication of whether the decay time is a problem or not.

For the same TWZ frequency results as shown in the histograms above the amplitude time series plot is shown below (note the y-axis scale is split into 2 plots to show the higher magnitude of the 0.04 Hz mode):

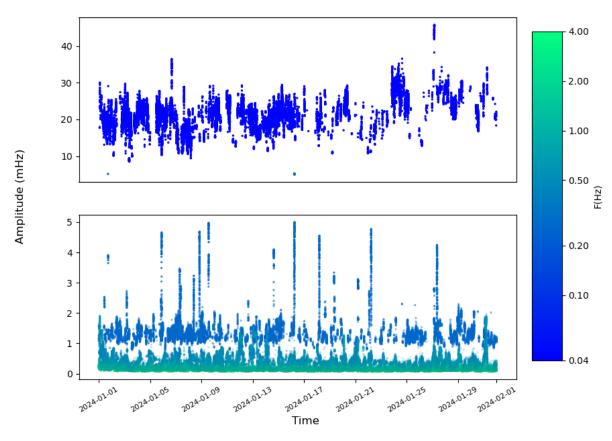

TWZf Amplitude vs. Time


The heat scale shows the modal frequency of the particular amplitude result, in this case the 5mHz peaks are all at or close to the 0.25Hz mode.

The histogram identifies that there are results with 5 mHz amplitude at this frequency - the time series plot indicates the spread of these peak occurrences through the month and also shows any other characteristics at that frequency – such as the 'normal' amplitude.


The corresponding damping cycles time series plot is shown below.

The relatively high decay times of the 0.04 Hz mode are seen to be all below 2 cycles at that modal frequency. When decay times are say 40 or 50 cycles at a particular modal frequency there may be more cause for concern.

TWZf Damping Cycles vs. Time

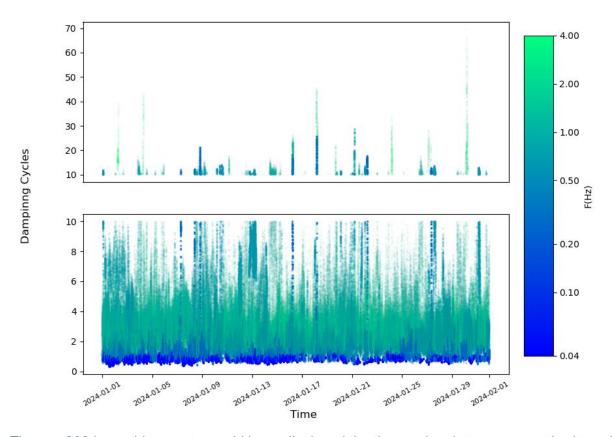

The pre-2024 monthly reports would have displayed the time series data as a smoothed trend with a frequency band (with all sites plotted together) i.e for the 0 to 0.4 Hz band :

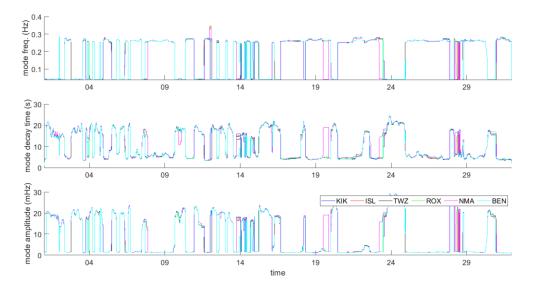

The new method of plotting shows all the data - this shows the full-month time series behaviour of all modes - and overcomes the issue of only showing the 'worst' result within a band (which causes the plot above to alternately show the 0.04 Hz mode and the 0.25 Hz mode).

4 Detailed plots for July 2024

4.1 Mode frequency histograms

Remark: the frequency histograms are shown for a frequency range [0.04 4Hz]

4.1.1 PMU Frequency Data

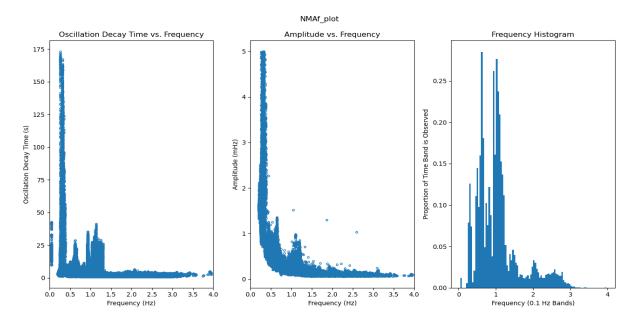


Figure 1: North Makarewa mode damping, mode amplitude, and frequency histogram using frequency data

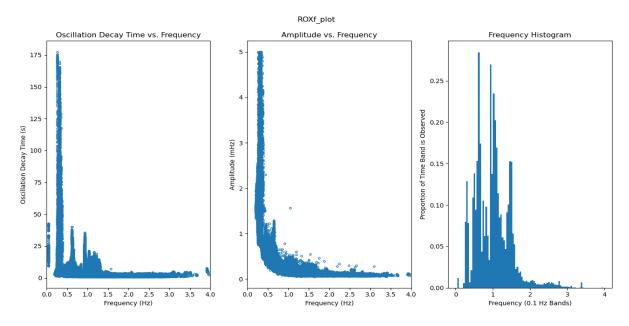


Figure 2: Roxburgh mode damping, mode amplitude, and frequency histogram using frequency data

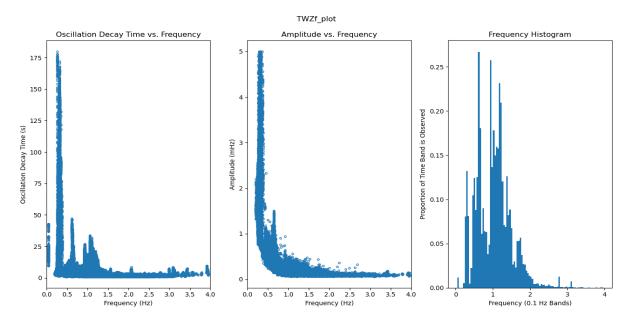


Figure 3: Twizel mode damping, mode amplitude, and frequency histogram using frequency data

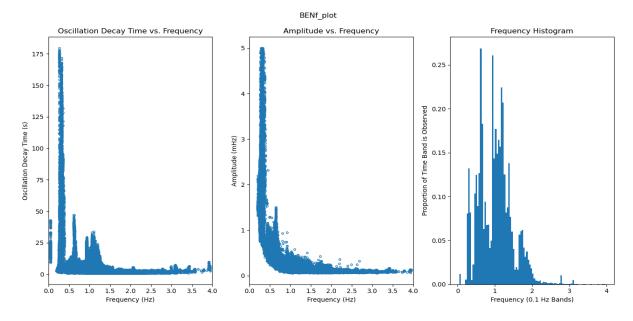


Figure 4: Benmore mode damping, mode amplitude, and frequency histogram using frequency data

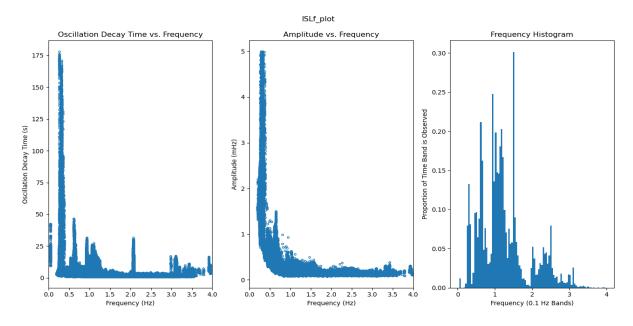


Figure 5: Islington mode damping, mode amplitude, and frequency histogram using frequency data

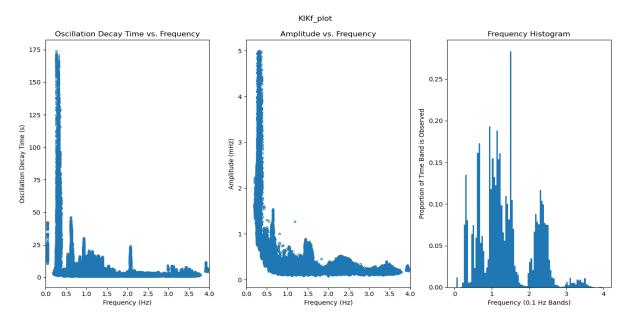


Figure 6: Kikiwa mode damping, mode amplitude, and frequency histogram using frequency data

4.1.2 PMU Active Power Data

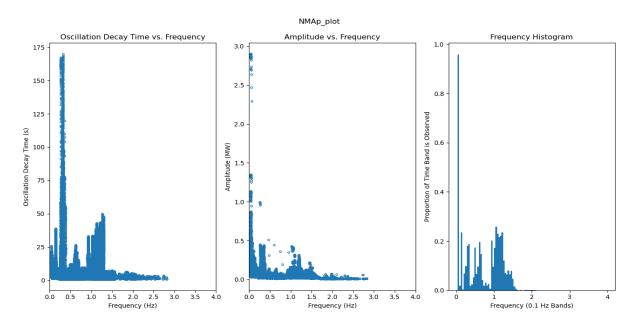


Figure 7: North Makarewa mode damping, mode amplitude, and frequency histogram using active power data

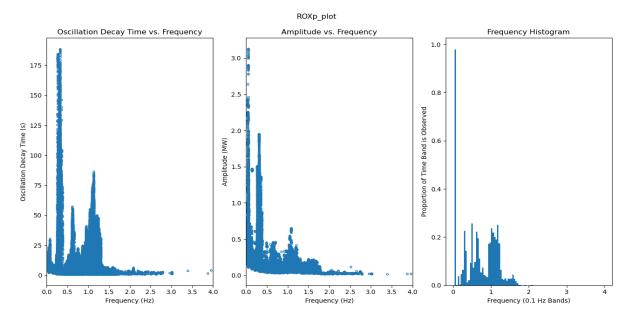


Figure 8: Roxburgh mode damping, mode amplitude, and frequency histogram using active power data

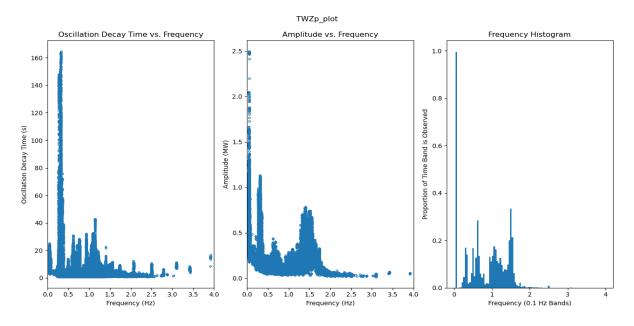


Figure 9: Twizel mode damping, mode amplitude, and frequency histogram using active power data

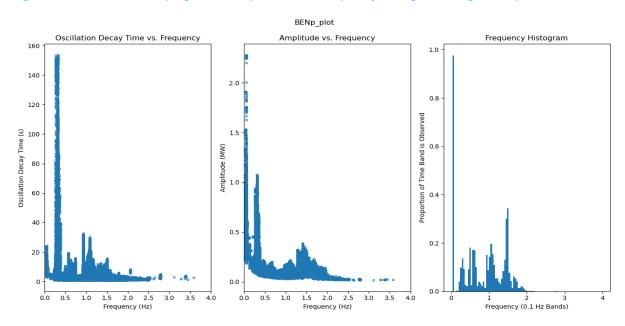


Figure 10: Benmore mode damping, mode amplitude, and frequency histogram using active power data

4.2 Time Series Plots

4.2.1 PMU Frequency data

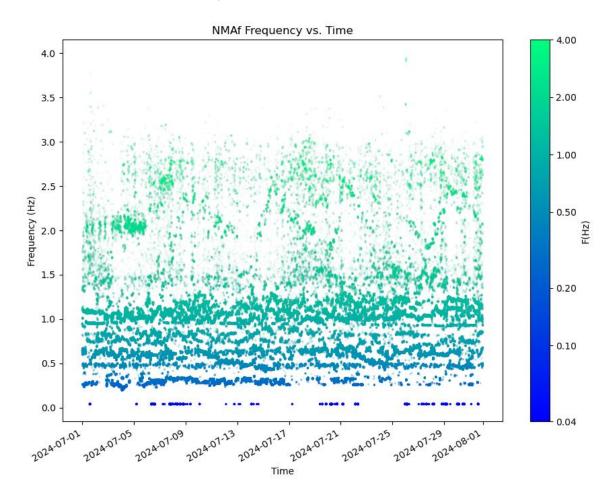


Figure 11: North Makarewa

NMAf Amplitude vs. Time

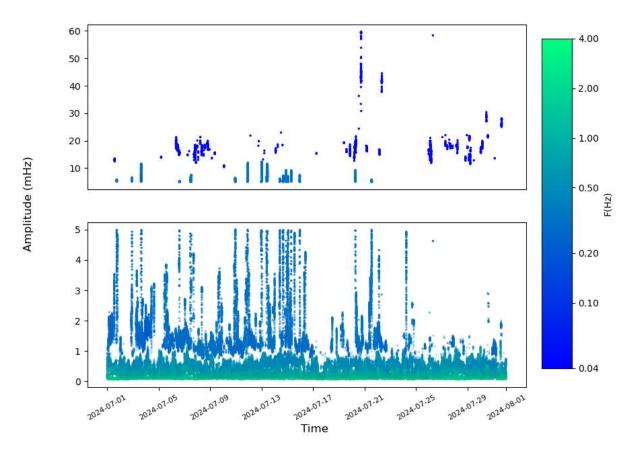


Figure 12: North Makarewa

NMAf Damping Cycles vs. Time

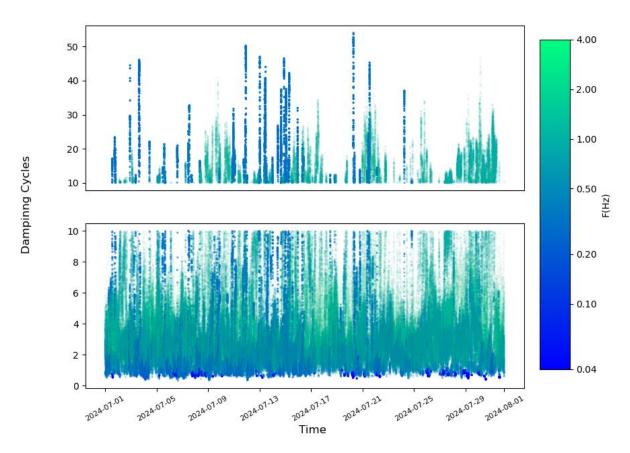


Figure 13: North Makarewa

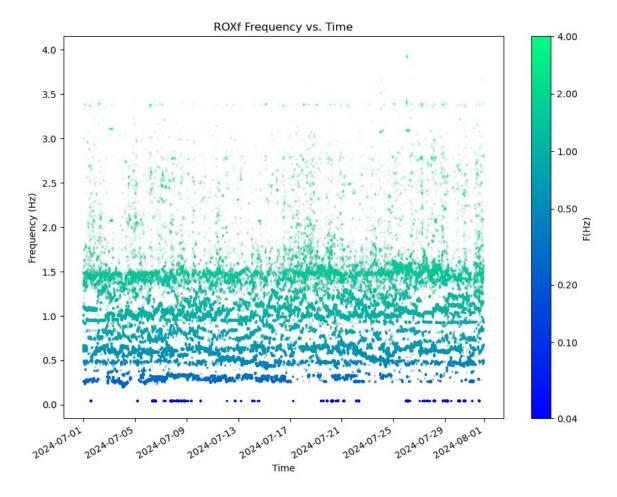


Figure 14: Roxburgh

ROXf Amplitude vs. Time

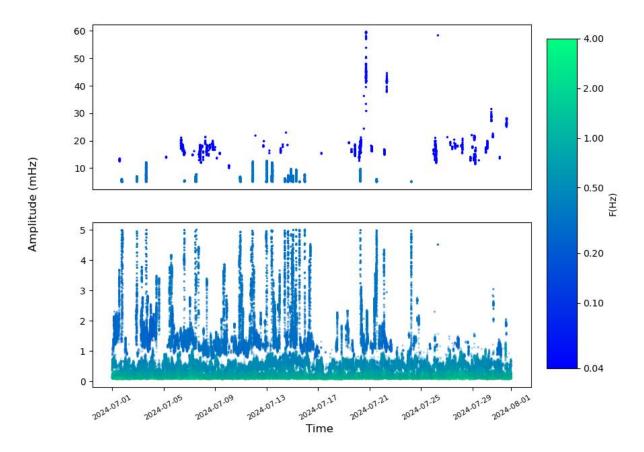


Figure 15: Roxburgh

ROXf Damping Cycles vs. Time

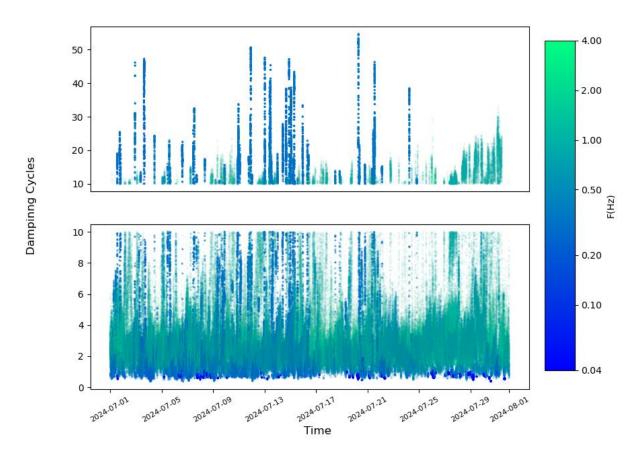


Figure 16: Roxburgh

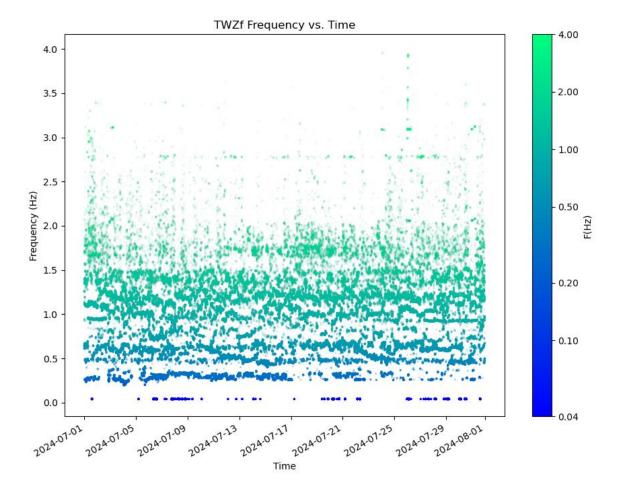


Figure 17: Twizel

TWZf Amplitude vs. Time

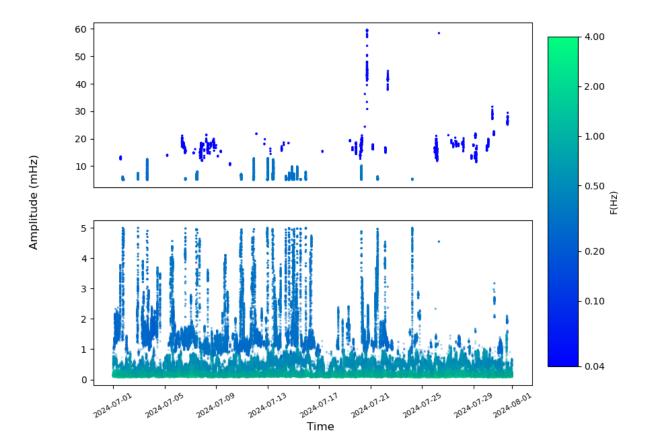


Figure 18: Twizel

TWZf Damping Cycles vs. Time

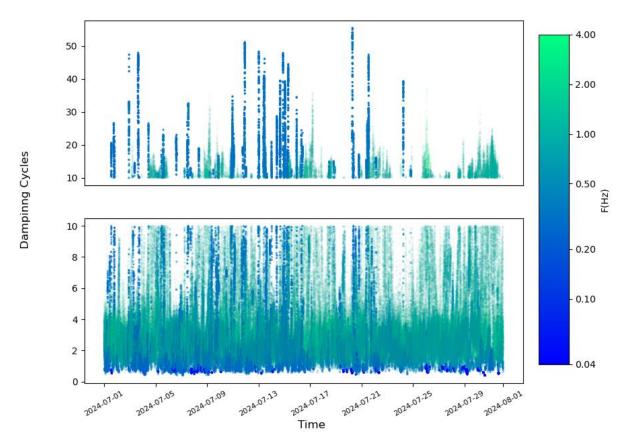


Figure 19: Twizel

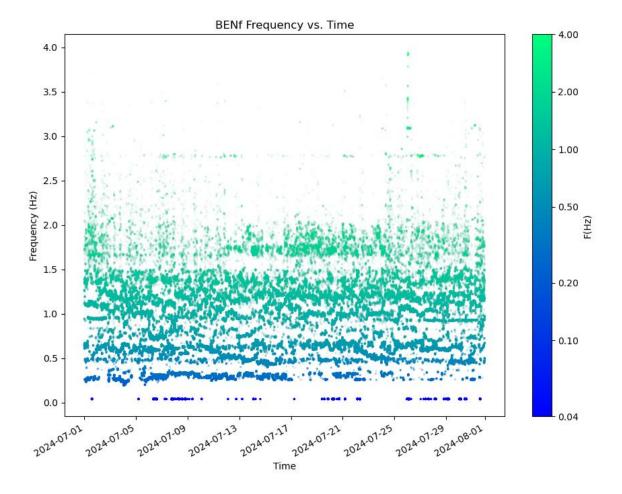


Figure 20: Benmore

BENf Amplitude vs. Time

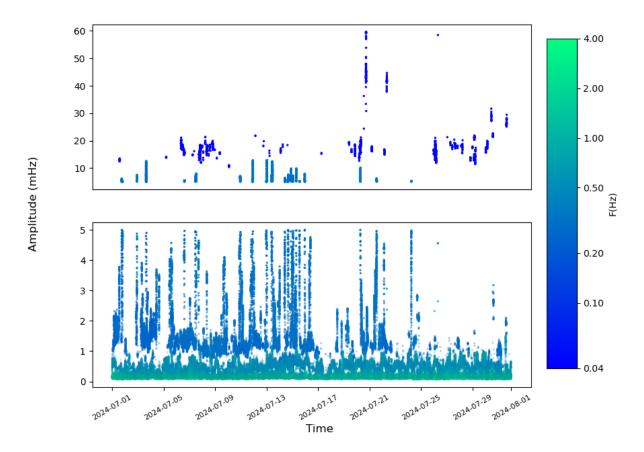


Figure 21: Benmore

BENf Damping Cycles vs. Time

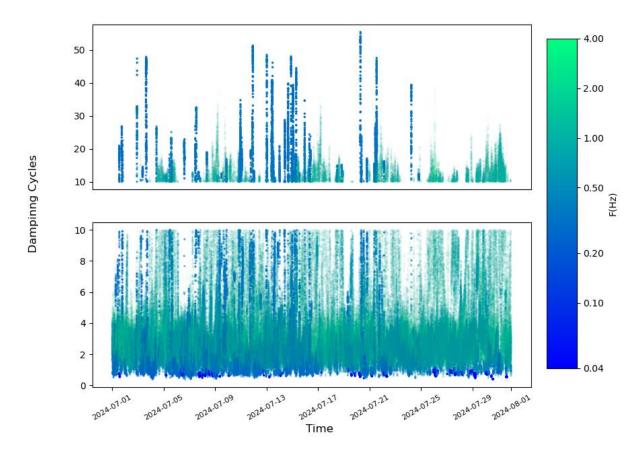


Figure 22: Benmore

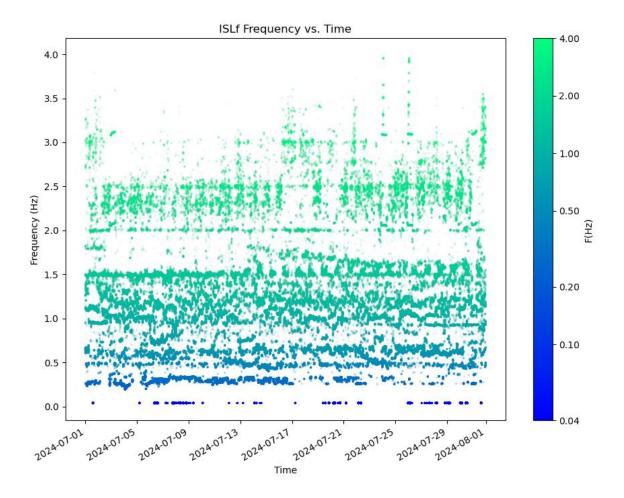


Figure 23: Islington

ISLf Amplitude vs. Time

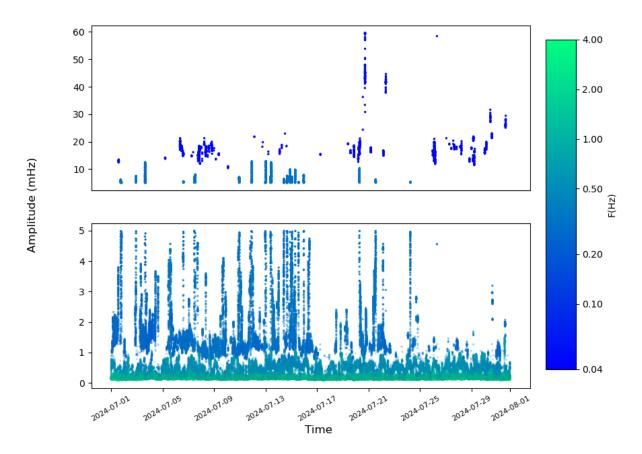


Figure 24: Islington

ISLf Damping Cycles vs. Time

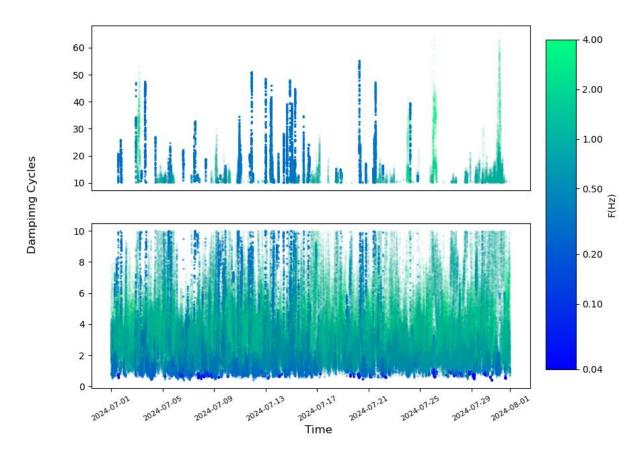


Figure 25: Islington

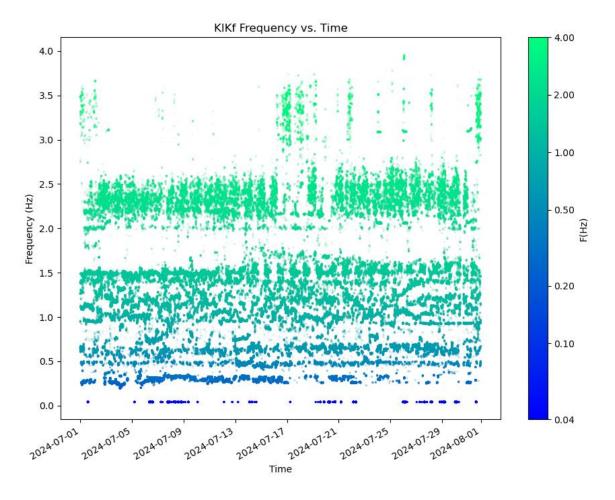


Figure 26: Kikiwa

KIKf Amplitude vs. Time

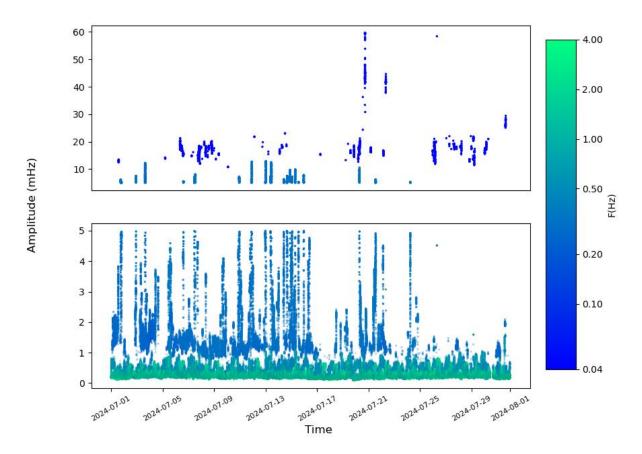


Figure 27: Kikiwa

KIKf Damping Cycles vs. Time

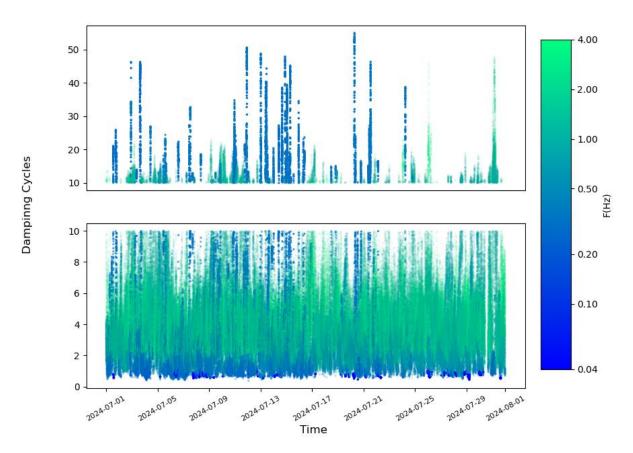


Figure 28: Kikiwa

4.2.2 PMU active power plots


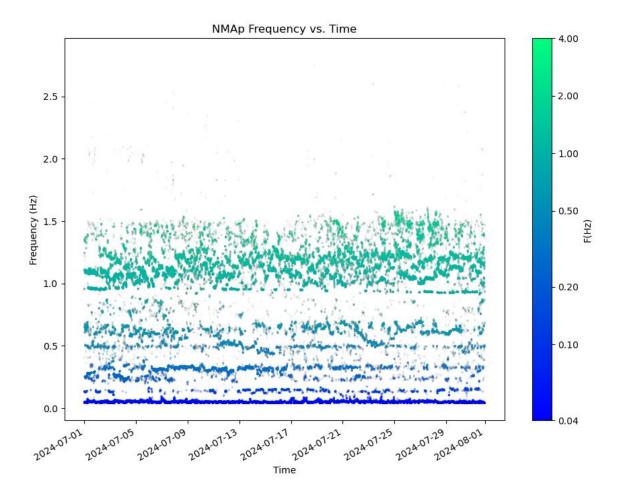


Figure 29: North Makarewa

NMAp Amplitude vs. Time

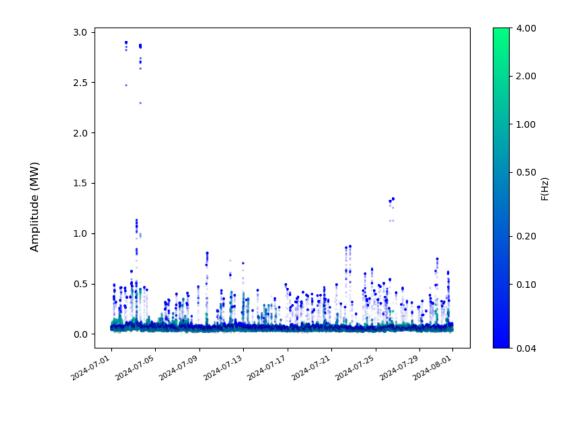

Time

Figure 30: North Makarewa

NMAp Damping Cycles vs. Time

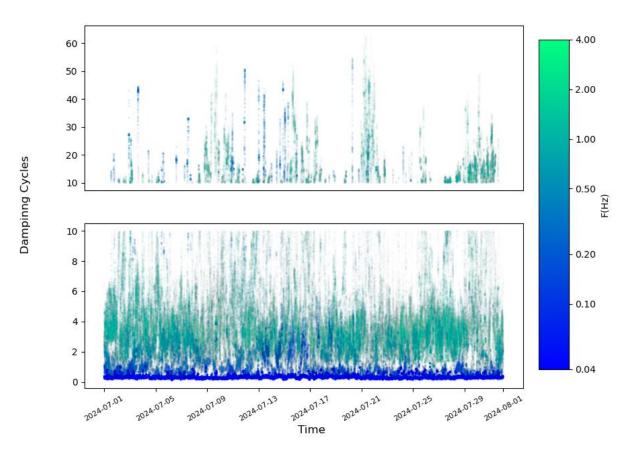


Figure 31: North Makarewa

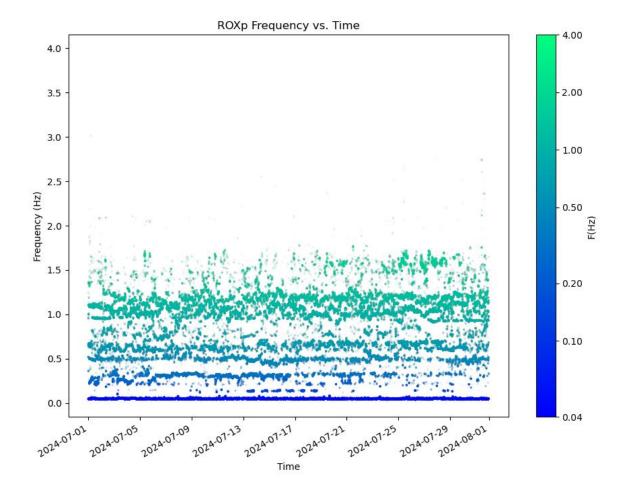


Figure 32: Roxburgh

ROXp Amplitude vs. Time

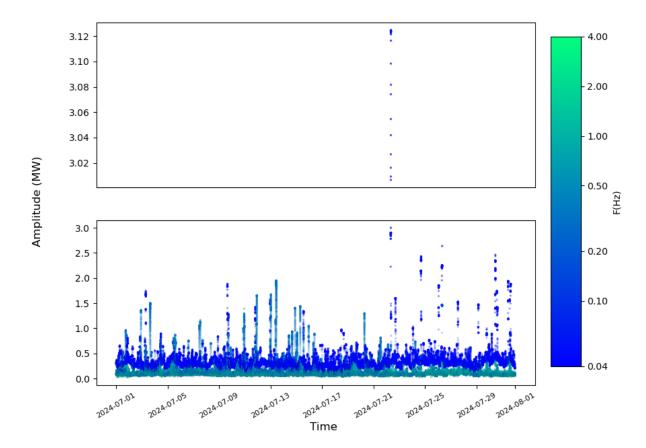


Figure 33: Roxburgh

ROXp Damping Cycles vs. Time

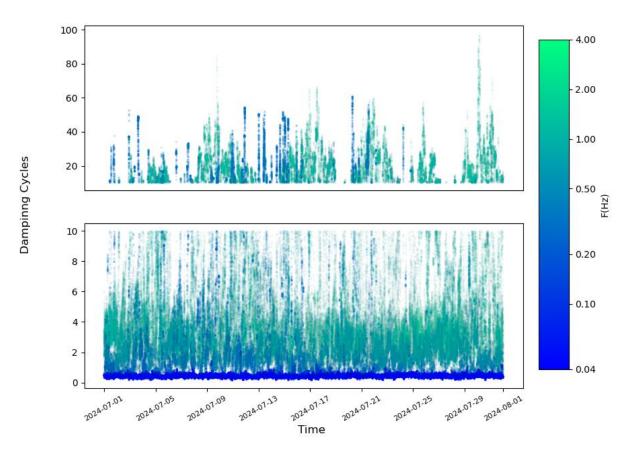


Figure 34: Roxburgh

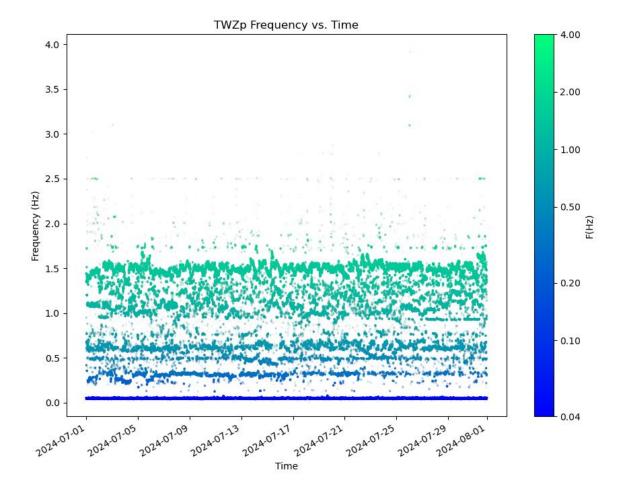


Figure 35: Twizel

TWZp Amplitude vs. Time

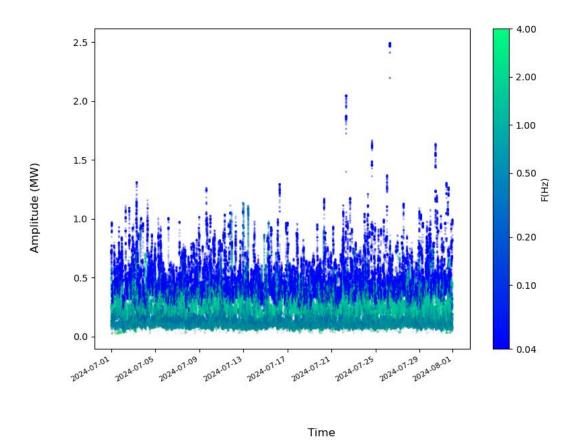


Figure 36: Twizel

TWZp Damping Cycles vs. Time

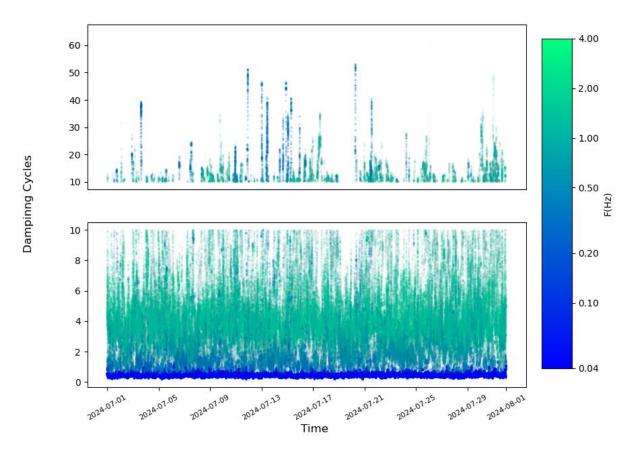


Figure 37: Twizel

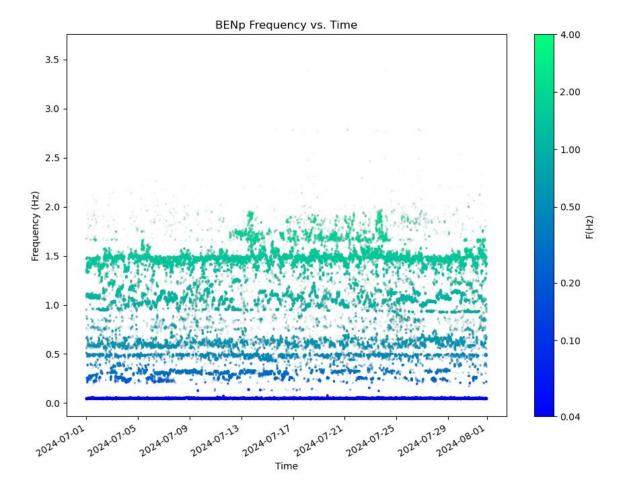


Figure 38: Benmore

BENp Amplitude vs. Time

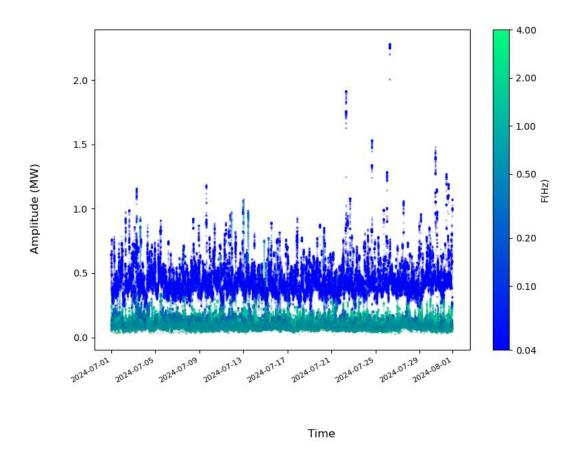


Figure 39: Benmore

BENp Damping Cycles vs. Time

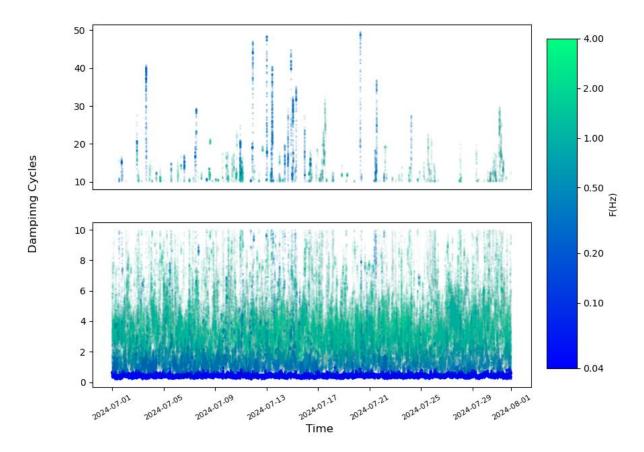


Figure 40: Benmore